

REPLACING A BULB IN AN OVERHEAD PROJECTOR


3M 1730-OVERHEAD PROJECTOR

CHANGING THE BULB

Make certain that power is turned off on overhead.



Release the latch
on the side of the overhead
and open the top.

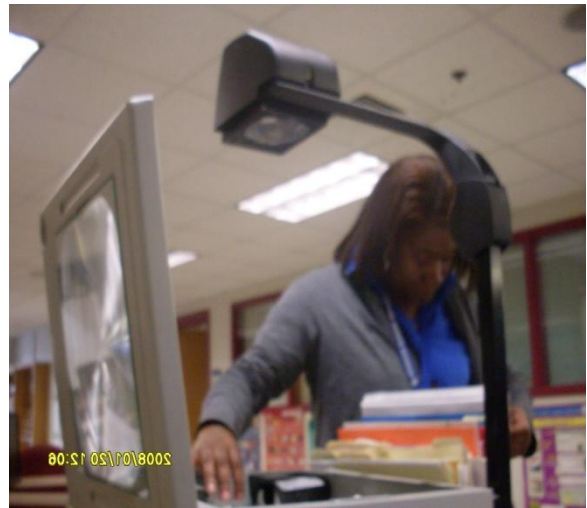

There is a metal bar located at the latch area
where the bulb is to be placed; squeeze it
and remove the bulb from the latch area.



Slide the new bulb securely in place
and make sure that it is secure
by moving the metal bar back in place.



Close the overhead top
and make sure that it locks
back into place properly.



Turn the overhead on to make
certain that the new bulb works
and/or is installed correctly.

