

# CONNECTING AN INTERACTIVE WHITEBOARD TO AN LCD PROJECTOR

Hitachi CP-X265 LCD Projector to a SMART Interactive Whiteboard

## SETUP

Face the projector towards the Whiteboard.

Connect the projector to the computer using a VGA cable. Make sure the cable is plugged in to the “RGB In” spot.



The other end will connect to the “RGB Out” spot on the computer.



Plug the projector’s power cord into an electrical outlet.

Connect the Interactive Whiteboard to the computer using a USB cable.




The Whiteboard does not plug into an electrical outlet.

Turn on the computer and projector.

The projector should automatically find the correct source: RGB, which is the connection to the computer. If it does not, press the **input** button to change the source manually to RGB.




To align the projector screen with the whiteboard, press the **menu** button on the projector. Scroll down to “Aspect” and find the aspect ratio that fits your screen.

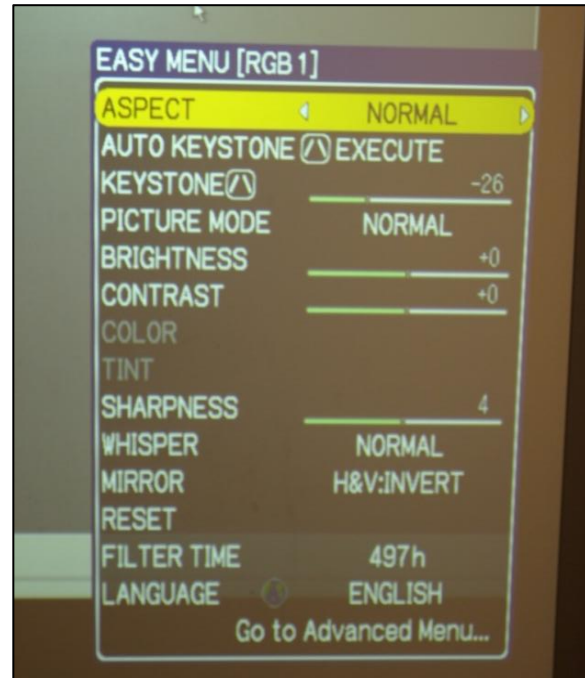

To align the interactive touch to the screen, hold down the keyboard key and right-click mouse key simultaneously.



An alignment screen will pop up on the whiteboard.

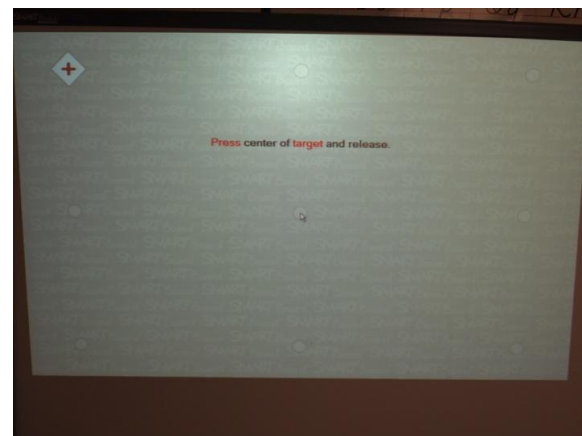

Touch each red point on the screen to properly align the interactive touch.